




Screw compressor package B 200

Direct driven non cooled systems

Versatile systems for clockwise or counter clockwise drive

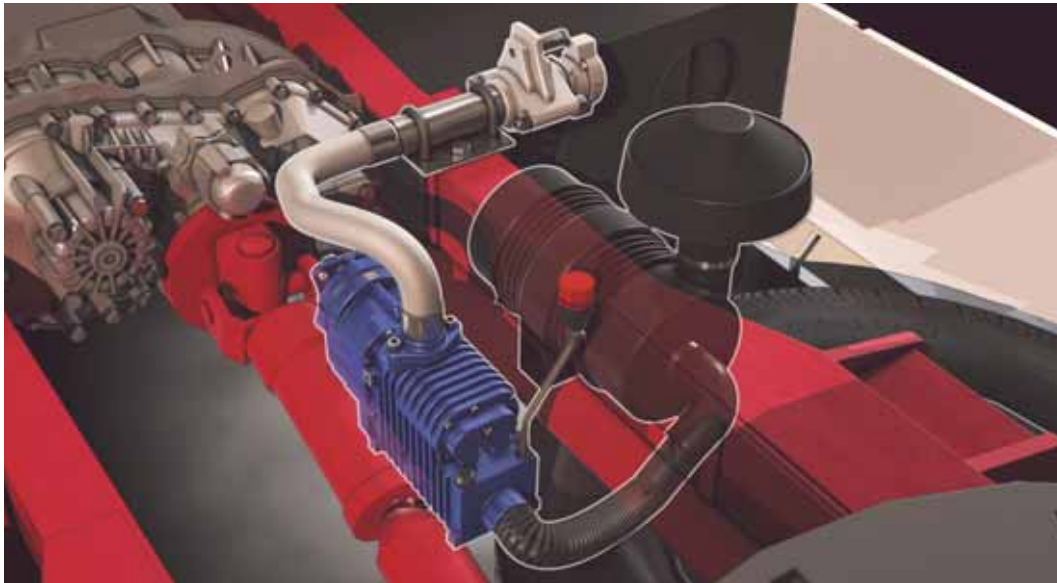

B 200 120 - 180 m³/h

Option PF
PTO Drive

Option PS
Electric Motor
Drive

Option HY
Hydraulic Motor
Drive



Gravity torque
under 50 Nm





Engine 1000 tr/mn
15 Kw




Gear motor
50 cm³



Screw compressor package B 200

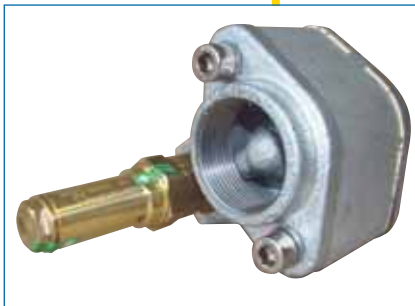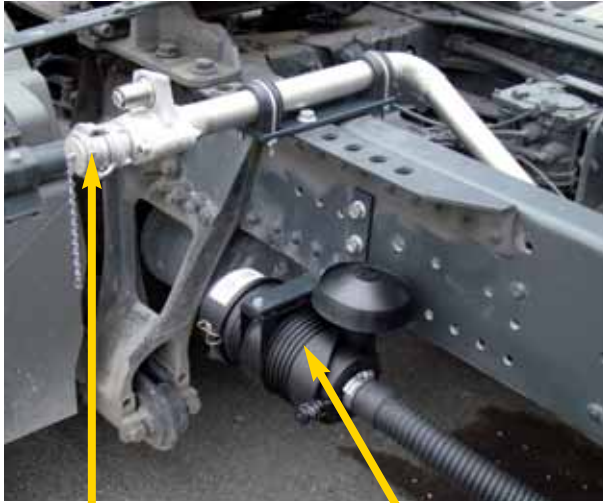

Check relief valve



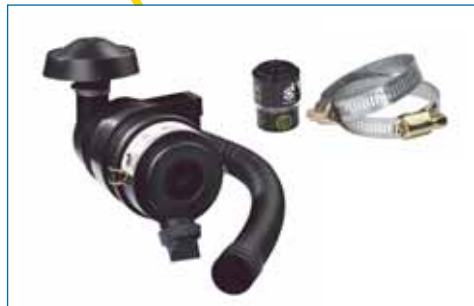


Suction filter



Outlet flexible pipe
(delivered with B200 PF)

◆ Torque Limiting Safety Devices

| VERSION | SHAFT END | SAFETY MODE |
|-----------|---|---|
| Option PF |  | Integrated, shaft breaking groove |
| Option PS |  | Done by thermal relay of electrical motor |
| Option HY |  | Done by the pressure relief valve |



Extra equipment : Hydrive 2010
for HY version



ZI la Plaine des Isles
rue des Caillottes
89000 AUXERRE - FRANCE
T + 33.3.86.49.86.30
F + 33.3.86.46.42.10
contact@mouvex.com



Distributed by :

Mouvex reserves the right to modify the information and illustrations contained in this document without prior notice. This is a non-contractual document. 01/09
Printed in FRANCE by Filigrane
© 2010 Mouvex

www.mouvex.com